


SUPER BULK GC1

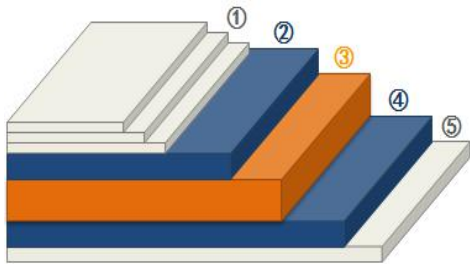

- ① Top coating
- ② Bleached sulphate pulp
- ③ BCTMP
- ④ Bleached sulphate pulp
- ⑤ Back coating

End Uses:
Premium cosmetics, medical, toys,
digital products packaging boxes.

Printability:
Suit for offset, UV Polishing, Water glazing,
Hot stamping gold or silver etc.



Items	Unit	Standards	Tolerance	Standard Substance									
				190	205	215	245	255	290	305	330	345	
Grammage	g/m ²	ISO536	±3%	190	205	215	245	255	290	305	330	345	
Thickness	µm	ISO534	±3%	265	310	340	395	415	465	490	530	555	
Taber Stiffness	MD	ISO2493	±15%	4.8	7.0	8.0	13.0	15.0	20.0	23.0	26.0	28.5	
	CD			2.4	3.2	4.0	6.0	7.0	9.0	11.0	13.0	15.0	
Cobb(60s)	g/m ²	ISO535	≤	60									
Surface roughness PPS10	µm	ISO8791-4	≤	1.6									
CD Folding Strength	Times	ISO5626	≥	15									
Surface strength	m/s	ISO3783	≥	1.3									
Ply bond	J/m ²	TAPPI 569	≥	130									
D65/10 Brightness(ISO)	TOP	ISO2470-2	±3	89									
	BACK			87									
75° Gloss	TOP	ISO8254	≥	45									
Moisture	%	ISO287	±1.5	7.5									

Testing Condition:

Temperature: (23±1) °C

Relative Humidity: (50±2) %

【For Export】

★Update November 5, 2022 Version: 4.0