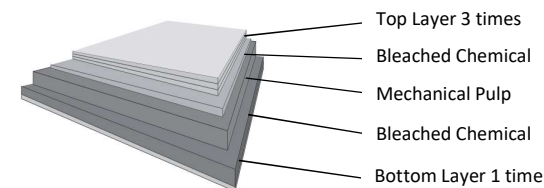


**EUCA C1S Folding Box Board**
**丽品单面涂布白卡纸**
**JXCM, ZJCM**

**Technical Specifications**

Items	项目	Unit	Standard/ Method	Nanchang					Nanchang&Zhanjiang				
				170±4	180±4	190±4	210±4	270±4	230±4	250±4	300±4	350±6	400±6
Basis Weight	定量	gsm	ISO 536	170±4	180±4	190±4	210±4	270±4	230±4	250±4	300±4	350±6	400±6
Caliper	厚度	μm	ISO 534	215±10	230±10	245±10	275±10	375±10	310±10	345±10	420±10	485±10	550±10
ISO Brightness	白度	%	ISO 2470-1	91.5±1	91.5±1	91.5±1	91.5±1	91.5±1	91.5±1	91.5±1	91.5±1	91.5±1	91.5±1
Roughness	粗糙度	μm	ISO 8791/4	≤1.2	≤1.2	≤1.2	≤1.2	≤1.2	≤1.2	≤1.2	≤1.2	≤1.2	≤1.2
Moisture	水分	%		8.3±0.3	8.3±0.3	8.3±0.3	8.3±0.3	8.6±0.3	8.6±0.3	8.6±0.3	8.6±0.3	8.6±0.3	8.6±0.3
Gloss 75°	光泽度	%	ISO 8254	≥48	≥48	≥48	≥48	≥48	≥48	≥48	≥48	≥48	≥48
Ink absorption	油墨吸收率	%	K&N	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3
Surface Printing Intensity	表面印刷强度	m/s	ISO 3783	≥2.5	≥2.5	≥2.5	≥2.5	≥2.5	≥2.5	≥2.5	≥2.5	≥2.5	≥2.5
Internal Bond Strength	层间结合力	J/m2	TAPPI 833 pm-94	≥150	≥150	≥150	≥150	≥150	≥150	≥150	≥150	≥150	≥150

Test conditions: ISO Temperature: 23±10C Humidity: 50±2%RH

FSC is available